

Features & Specification

Juno

chilled ❄️



ITALIAN TAPWARE

Multi Function Mixer Tap System



Chrome Finish
Product Code: CHJUNO-CH




Black Finish
Product Code: CHJUNO-JB



Brushed Finish
Product Code: CHJUNO-BR

- Filtered chilled water from push button
- Filtered boiling water (98°C)
- Standard hot and cold water lever
- Easy to replace existing kitchen mixer
- Made from high quality DZR Brass
- Tap designed and made in Italy
- Safety lever on near boiling tap
- Requires mains water pressure
- Complete installation kit supplied
- 5-year in-home warranty - Residential only
- WaterMark certified
- WELS certified

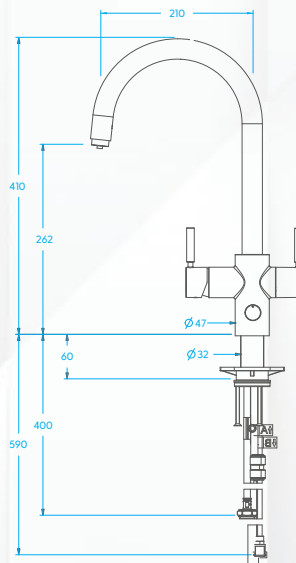

NeoTanks, NeoChiller, filters & full installation kit included.

Please note these products are for domestic use only and the warranty is void if installed in a commercial application.



ITALIAN TAPWARE


in sink erator
multitap
chilled ❄️

NeoTank[®] Specifications

Neo-



- NeoTankTM is only about the size of a toaster, making it easy to hang on the back wall under your kitchen bench with minimum fuss.
- The 2.5-litre capacity is easily sufficient for most kitchen tasks while reducing the heating requirement and saving you energy costs.
- Finger-tip control with a touch panel display for precise temperature adjustment (89°C-98°C).
- Able to run on a standard electrical circuit drawing 5.6AMPs with an element size of 1.3KW.
- Quiet, energy-efficient operation.
- Easy installation with tool-free connections and dry-start protection.
- Standard 3-pin plug that plugs straight into a wall socket.

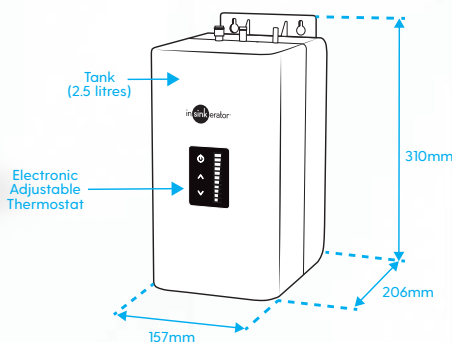




WARNING: While the MultiTap has a safety lever, please be careful when dispensing near boiling water and children should be kept away.

NeoChiller[®] Specifica-


Neo-




- Small, compact domestic chiller unit
- Designed for easy installation under the kitchen sink
- Dispenses up to 7 litres per hour of cold, still water between 3°C and 10°C
- Filtered to remove impurities and odours, without affecting the water's natural mineral content
- Ice-bank cooling technology for optimum performance
- Standard 3-pin plug that plugs straight into a wall socket.
- CE approved



Placement guide with minimum clearances for NeoTank installation.



It is recommended to have cabinetry vented to create adequate air-flow.



IMPORTANT NOTICE
Remove red plug from ICE BANK FILL port (C). Connect plastic tube to this port on the other end to the Y fitting (smaller side). Turn on water supply and fill ice bank use fill marking. When full remove plastic tube from chiller and insert plug.



WaterMark Certified

in sink erator
multitapTM
chilled ❄️
insinkerator.co.nz

For more information contact Parex Industries Limited on Tel: 0800 200 510 or email: info.parex@emerson.com
InSinkErat^{or} reserves the right to change product specifications without prior notice.

